

SS SUBMERSIBLE PUMPS

50Hz Catalogue




PUMPS | PIPES | CABLES | SOLAR PUMPS




C6PSF60, 50Hz

ISO 9906 Annexure A

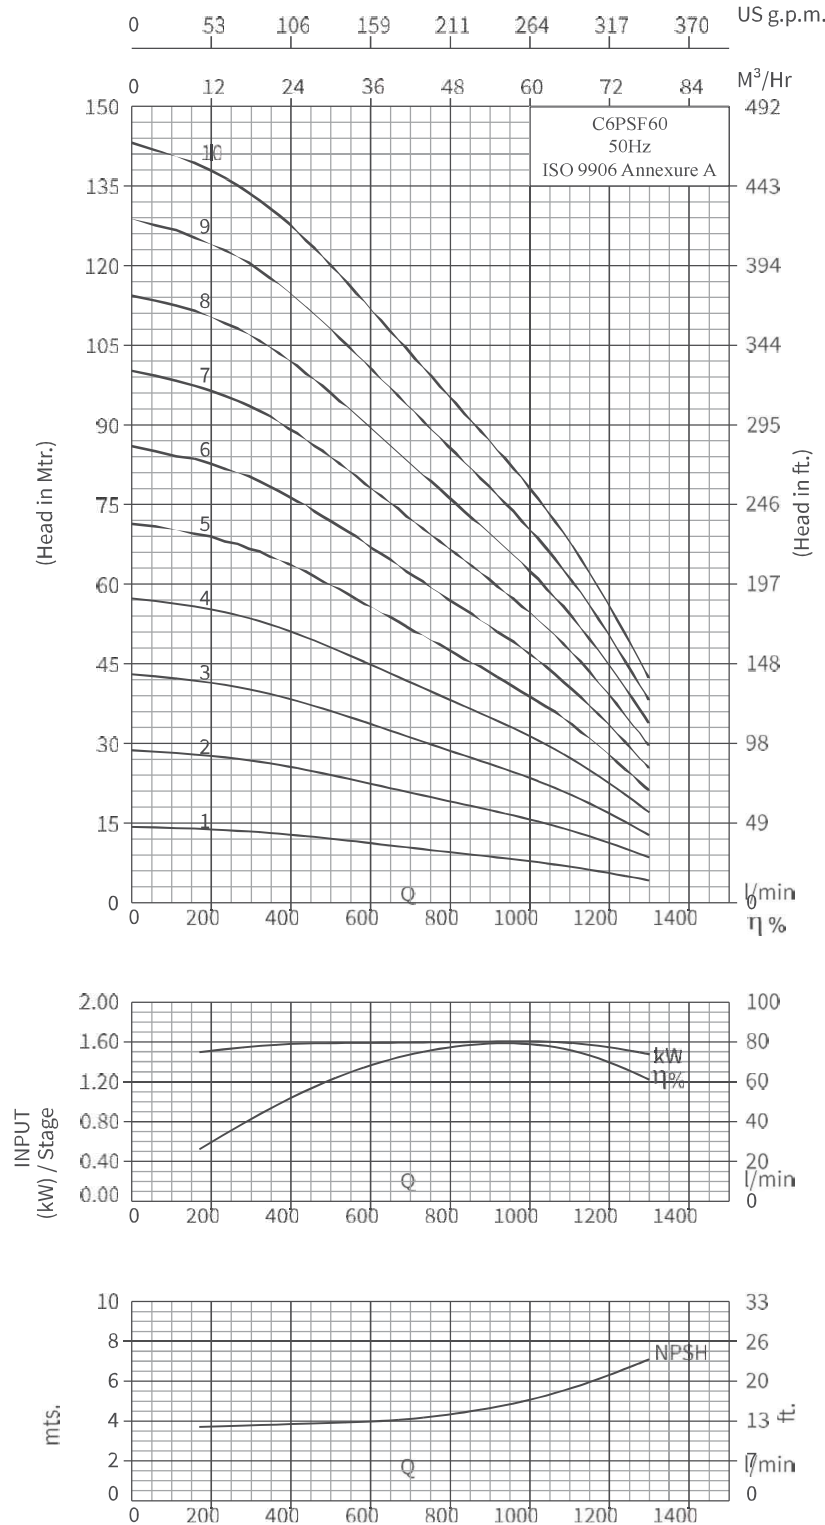

C6PSF60, 50Hz

ISO 9906 Annexure A

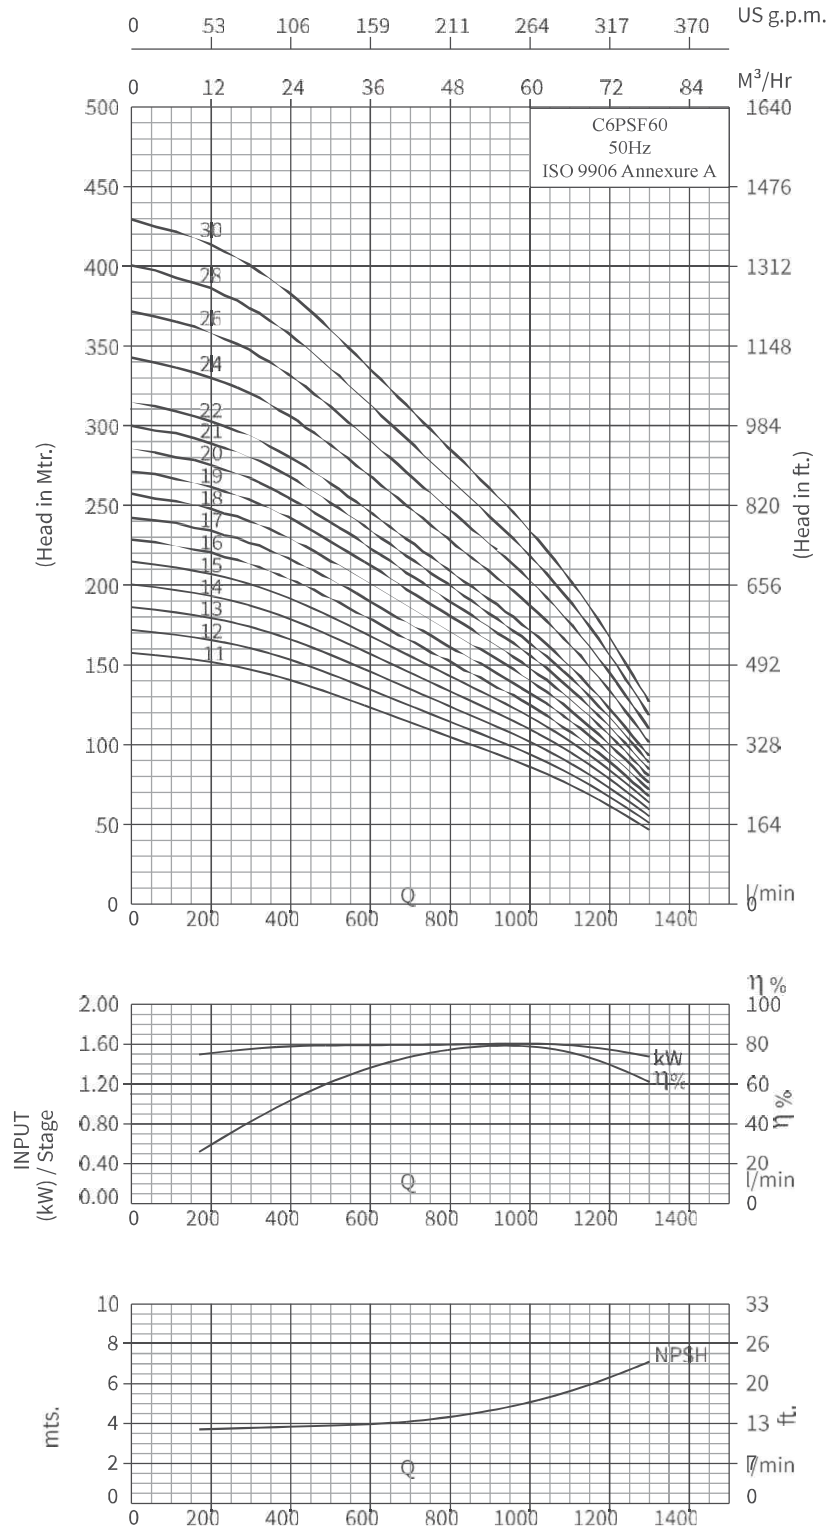

C6PSF60, 50Hz


ISO 9906 Annexure A

kW	HP	Stage	Motor Joinings	Outlet Size	Discharge						
					m ³ /h	0	24	36	48	60	72
					Ipm	0	400	600	800	1000	1200
1.5	2	1-A	V-6	4'BSP	Head in Mtrs.	11	9	7	6	4	0
2.2	3	1	V-6	4'BSP		14	12	11	9	7	5
3	4	2-B	V-6	4'BSP		21	20	16	14	10	6
3.7	5	2	V-6	4'BSP		28	26	22	19	15	11
5.5	7.5	3	V-6	4'BSP		43	38	33	28	23	17
7.5	10	4	V-6	4'BSP		57	51	44	38	31	22
9.3	12.5	5	V-6	4'BSP		71	64	55	47	39	28
11	15	6	V-6	4'BSP		85	77	66	56	46	33
13	17.5	7	V-6	4'BSP		85	77	66	56	46	33
13	17.5	8-B	V-6	4'BSP		99	90	77	66	54	39
15	20	8	V-6	4'BSP		106	97	82	70	56	39
15	20	9-B	V-6	4'BSP		114	102	88	75	62	44
18.5	25	9	V-6	4'BSP		121	109	93	79	64	44
18.5	25	10	V-6	4'BSP		128	115	99	85	69	50
22	30	11	V-6	4'BSP		142	128	110	94	77	55
22	30	12	V-6	4'BSP		156	141	121	103	85	61
26	35	13	V-6	4'BSP		170	154	132	113	92	66
26	35	14	V-6	4'BSP		185	166	143	122	100	72
26	35	15	V-6	4'BSP		199	179	154	132	108	77
30	40	16	V-6	4'BSP		213	192	165	141	116	83
30	40	17	V-6	4'BSP		227	205	176	150	123	88
30	40	18	V-8	4'BSP		241	218	187	160	131	94
37	50	19	V-8	4'BSP		256	230	198	169	139	99
37	50	20	V-8	4'BSP		270	243	209	179	146	105
37	50	21	V-8	4'BSP		284	256	220	188	154	110
45	60	22	V-8	4'BSP		298	269	231	197	162	116
45	60	23	V-8	4" BSP		312	282	242	207	169	121
45	60	24	V-8	4" BSP		327	294	253	216	177	127
55	75	26	V-8	4" BSP		354	318	274	234	192	137
55	75	28	V-8	4" BSP		381	342	295	252	207	147
55	75	30	V-8	4" BSP	408	366	316	270	222	157	

C6PSF60, 50Hz

ISO 9906 Annexure A

Dimensions & Weights

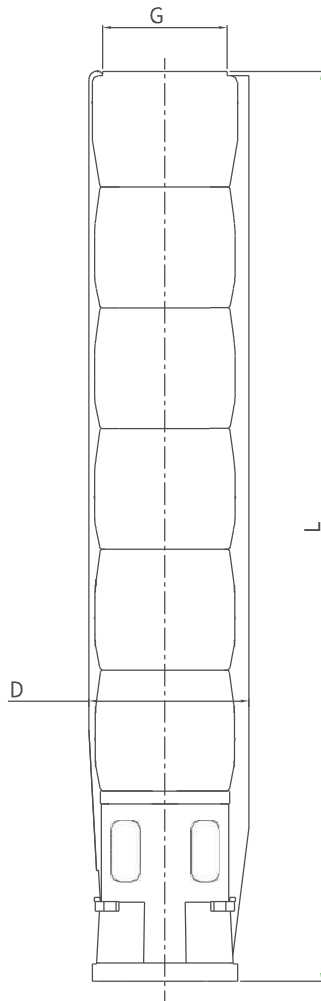

Model Name	Specification			
	D (mm)	L (mm)	Pump Weight Kg.	Weight (incl. pkg.) Kg.
C6PSF60 / 01	147	113	12	14
C6PSF60 / 02	147	509	14	15
C6PSF60 / 03	147	622	16	17
C6PSF60 / 04	147	735	18	21
C6PSF60 / 05	147	848	20	23
C6PSF60 / 06	147	961	18	24
C6PSF60 / 07	147	1074	20	25
C6PSF60 / 08	147	1187	22	28
C6PSF60 / 09	147	1300	24	29
C6PSF60 / 10	147	1413	26	34
C6PSF60 / 11	147	1526	28	36
C6PSF60 / 12	147	1639	32	42
C6PSF60 / 13	147	1752	34	44
C6PSF60 / 14	147	1865	36	46
C6PSF60 / 15	147	1978	38	48
C6PSF60 / 16	147	2091	40	50
C6PSF60 / 17	147	2204	42	52
C6PSF60 / 18	147	2317	44	54
C6PSF60 / 19	147	2430	46	56
C6PSF60 / 20	147	2543	48	58
C6PSF60 / 21	147	2656	50	60

G: Available outlet size 3" & 4"

D: With cable Guard

DP60 -1 to DP60 -4 pumps are also available in 4" Joining.

DP60 -22, DP60 -24, DP60 -25, DP60 -28 &

DP60 -30 pumps are available in 8" Joining.